


COMPACT RANGE
6.30 - 7.30 - 9.30



TELESCOPIC HANDLERS **AGRICULTURAL LINE**

Compact Range

Available configurations: **CLASSIC / AGRITOP / GLS / VPS**
Maximum lifting capacity 3t
Maximum height 6m to 9m

The Compact Range really comes into its own when you need all of the features and capabilities normally only found in larger machines. The Compact Range gives you everything you need and more when the task requires a lot of performance in a smaller frame machine in confined spaces.




Nothing is more important to us than your safety.

QLD LOGANHOLME - BEAUDESERT - DALBY - GOONDIWINDI
NSW MOREE - INVERELL - COONAMBLE - WARREN - DUBBO - RUTHERFORD
VIC TAREE - MACLEAN - WAGGA WAGGA - TAMWORTH
SA WODONGA - MILDURA
WA PINNAROO - LOXTON
ESPERANCE - ALBANY - GNOWANGERUP

For more information on our Faresin range of products contact;
1300 FARESIN (327 374)
www.faresinindustries.com.au

Images for illustration purposes only. All information contained is subject to change without notice.

DIMENSIONS	6.30	7.30	9.30
A. Height	2260	2260	2260
B. Width	2117	2117	2117
C. Gauge	1602	1602	1602
D. Ground clearance	350	350	350
E. Front overhang	1046	1046	1046
F. Pitch	2950	2950	2950
G. Rear overhang	684	684	684
H. Length without tow hitch	4680	4680	4680
I. Length with tow hitch	4781	4781	4781
L. Cabin width	960	960	960

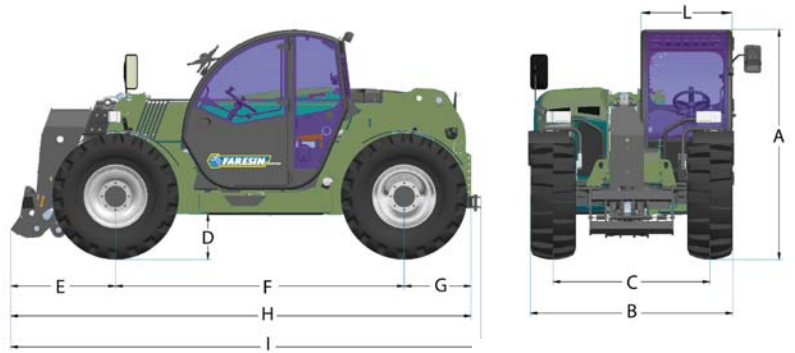

MODELS	6.30 C	7.30 C	9.30 C
WEIGHT			
Maximum total unladen weight (kg)	6550	6550	6950
SPECIFICATIONS			
Number of extracting sections	1	1	2
Max capacity (kg)	3000	3000	3000
Max lifting height (m)	6	7,1	8,9
Max horizontal boom extension (m)	2,5	3,6	5,9
Boom extension at max height (m)	0,0	0,3	0,9
Swinging angle of forks (°)	155	155	155
TANK CAPACITY			
Hydraulic oil tank (l)	150	150	150
Diesel oil tank (L)	120	120	120
Hitch	EURO	EURO	EURO

CONFIGURATION	CLASSIC COMPACT	AGRI GLS COMPACT	GLS COMPACT	VPS COMPACT
Transmission	Hydrostatic with mechanical gearbox up to 40 km/h			Continuous speed variation 0-40 km/h
Engine (kW/HP)	75/101 Deutz Stage IIIA	IVECO 93/130 Stage IIIA	IVECO 93/130 Stage IIIA	90/122 Deutz Stage IIIB
Service pump (l/min)	gears 110 @230 bar	piston load sensing 145@250 bar		
Towing force (daN)	up to 5570	up to 5570	up to 5570	fino a 7000
Front and rear LED lights	standard	standard	standard	standard
Ecofast	-	standard	standard	standard
Creeper	-	standard	standard	standard
Floating boom	standard	standard	standard	standard
Boom suspension	standard	standard	standard	standard
3-point hitch and rear PTO	-	standard	optional	optional
Pneumatic/hydraulic trailer brakes	optional	optional	optional	optional
Front constant flow	-	standard	standard	standard
Cabin	Queen Cab	Queen Cab	Queen Cab	Queen Cab
Air conditioning	standard	standard	standard	standard
Joystick	mechanical electro-proportional	hydraulic electro-proportional		
Manual 6-way diverter	standard	standard	standard	standard
Rear hydraulic connection with dual electro proportional effect	-	standard	optional	optional
Rear trailer lights socket	-	optional	optional	optional
Engine water pre-heating	optional	optional	optional	optional
Quick coupling	standard	standard	standard	standard
Electric 6-way diverter with PEB	optional	optional	optional	optional
PEB	optional	optional	optional	optional
Tyres 405/70 - 20"	standard	optional	optional	optional
Tyres 405/70 - 24"	optional	standard	standard	standard
Tyres 445/70 - 24"R	optional	optional	optional	optional
Wheels External Turning Radius (MM)	3870 (405/70-24")	3870 (405/70-24")	3870 (405/70-24")	4500 (405/70-R24")
Version HS 40 km/h	standard	standard	standard	standard



For more information on our Faresin range of products contact;

1300 FARESIN (327 374)

www.faresinindustries.com.au